

The suspended pedal consisted of a base unit (nylon 6, GF 15%) and a pre-fitted pedal lever (Carbon Steel + Black Coated).

Twin return springs are used to replicate the pedal forces and direction-dependent hysteresis and to provide added safety.

Pedal position feed back is provided by a contactless sensor connected to either an analog or PWM signal circuit, depending on the variant. The no-load state can be detected either by an optocoupler or mechanically via a microswitch.







※ Arm is adjustable as per customer's request.

## SPECIFICATIONS

<b>PRODUCT LIFE</b>	FULL TRAVEL CYCLES	10 MILLION
<b>ELECTRONICS</b>	SEAL INTEGRITY	IP67
	EMI	SAE J1843 Compliant
<b>ELECTRICAL</b>	OPERATING VOLTAGE	5, 12, 24, 48 72Vdc as requested
	OUTPUT SIGNAL	Single, Dual output, PWM, CAN Bus as per SAE J-1939
<b>PEDAL ANGLE</b>	DEGREES	25° Angular Rotation
<b>MECHANICAL</b>	OPERATING FORCE	Initial Load : 2.2kgf (MIN), Full Throttle : 3.2kgf (MAX)
	VIBRATION	8 Hour, 3-Axis, Random Broadband up to 9G
<b>ENVIRONMENTAL</b>	OPERATING TEMP RANGE	-40°C to 85°C
	STORAGE TEMP RANGE	-40°C to 85°C
	HUMIDITY	After Exposed to -32°C ~ 70°C (96%)
	SAND/DUST	Tested to SAE-J 1455
<b>MATERIALS</b>	BASE PLATE	SPCC+PFZn+05B
	FOOT TREADLE	SS400 + Black Coated
	TREADLE COVER	PA6+GF15%

Part No. -

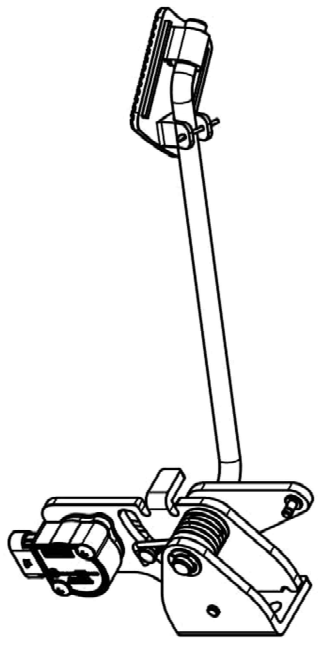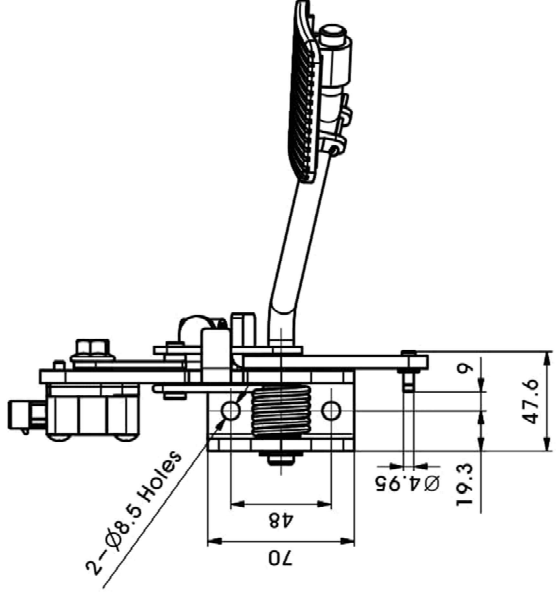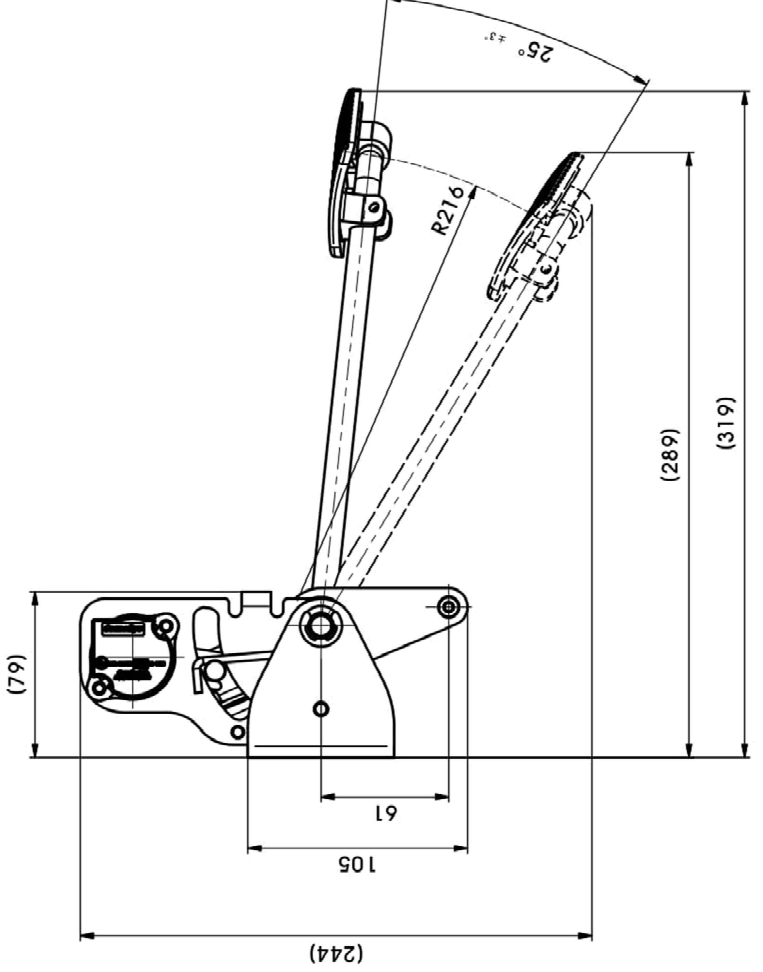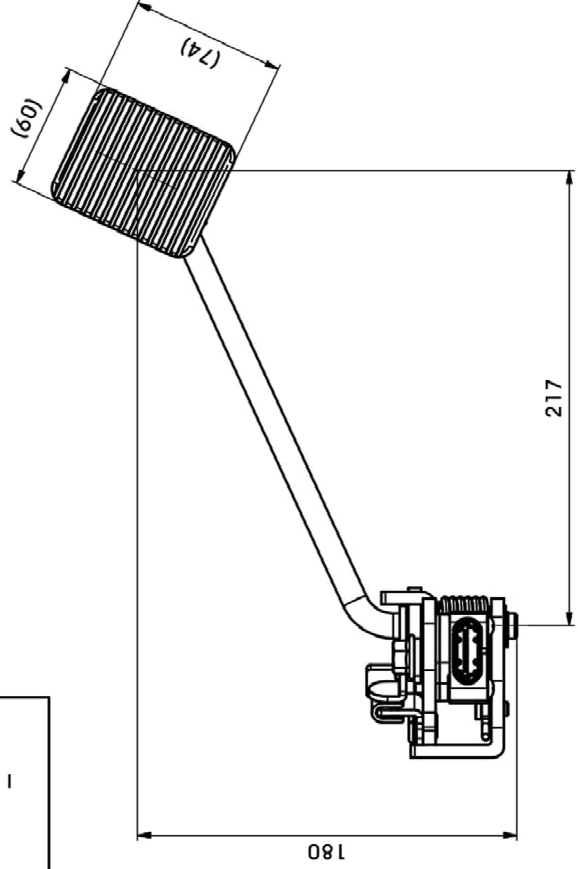

REVISION HISTORY

REV	DESCRIPTION	DATE	DR	RE	AP
0	Issued	05.Mar.20	M.J.Kim	J.I.Kim	J.H.Lee

ComeSys		Control & Measurement Systems Limited		Name	
Control Software for Mechanical (CSM) 1.0.0.12	Copyright © 2012	Control & Measurement Systems Limited	Control & Measurement Systems Limited	Electric Accelerator Pedal Assy (MST10)	
CSM 1.0.0.12	1.0.0.12	CSM 1.0.0.12	1.0.0.12	Application Model	
CSM 1.0.0.12	1.0.0.12	CSM 1.0.0.12	1.0.0.12	Material	
CSM 1.0.0.12	1.0.0.12	CSM 1.0.0.12	1.0.0.12	Weight	
CSM 1.0.0.12	1.0.0.12	CSM 1.0.0.12	1.0.0.12	Customer Part No.	
CSM 1.0.0.12	1.0.0.12	CSM 1.0.0.12	1.0.0.12	Sheet 1 of 1	